

F1 Integrated series Zoomable tracklight

20-35W

15-55° beam angle adjustable



Commercial lighting Expert

Your reliable Commercial Lightng Solution Partner from China

Features:

Materials: ADC12 Die cast Aluminum

Size: D92xH190mm

Finish: White RAL9016
Black RAL9003

LED brand: Citizen COB LED

LED lumen: 130-150lm/W @CRI80

Lamp efficiency: 90-120lm/W

Color:&CRI: 2700K 80+,90+,97+
3000k 80+,90+,97+
3500K 80+,90+
4000k 80+,90+,99+
5000K 80+,90+

Track adapter: Powergear 6/4 wire 3 phase, 3/2 wire 1 phase
Global 6/4 wire 3 phase
Unipro 4 wire 3 phase

Driver brand: Osram, Tridonic, Philips, HEP, TCI, BOKE, Lifud

Voltage: AC200-240V, AC100-240V

Power Factor: >0.90

Dimmable: DALI, TRIAC, 0/1-10V, ZigBee, RF, Push

Wattage: 20W, 25W, 30W, 35W


Adjustable: Continual 350°
Vertical 90°

Beam angle: 15-55° beam angle adjustable

Warranty: 3-5 years




Drawing @ size

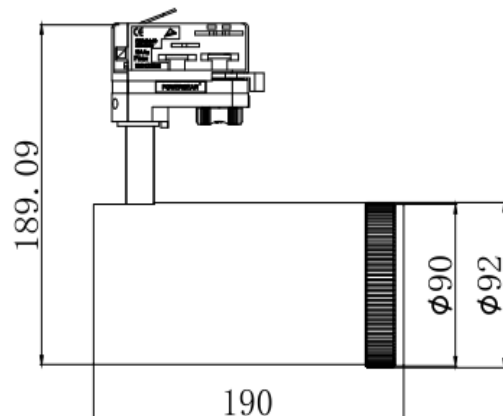


Light Distribution

Beam angle: 15°

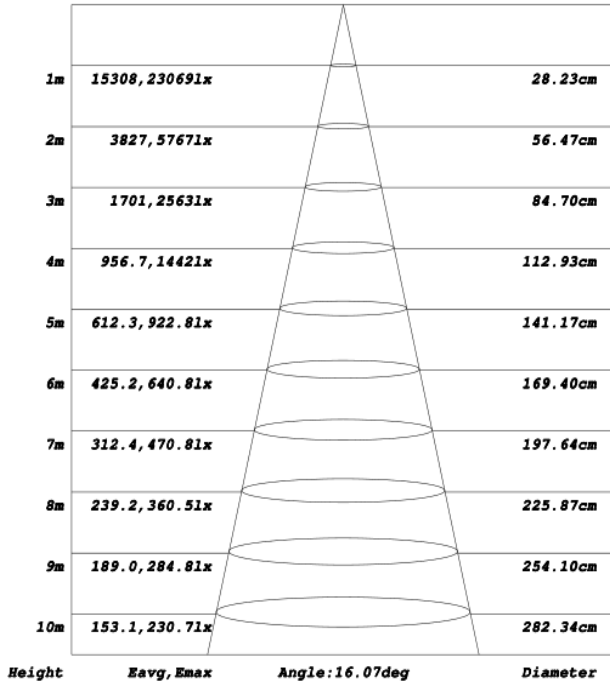


Beam angle: 55°

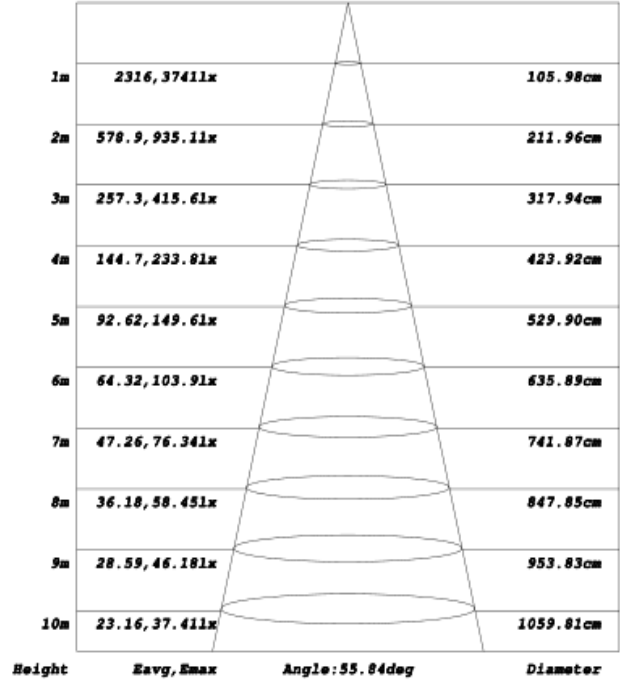


Package:

Model	XH-TL-20W-F1Z	XH-TL-25W-F1Z	XH-TL-30W-F1Z	XH-TL-35W-F1Z
Quantity:	15pcs	15pcs	15pcs	15pcs
Inner box size:	95x95x300mm	95x95x300mm	95x95x300mm	95x95x300mm
Carton size:	512x312xH320mm	512x312xH320mm	512x312xH320mm	512x312xH320mm
Gross Weight:	19.5kg	19.5kg	19.5kg	19.5kg

Installation manual

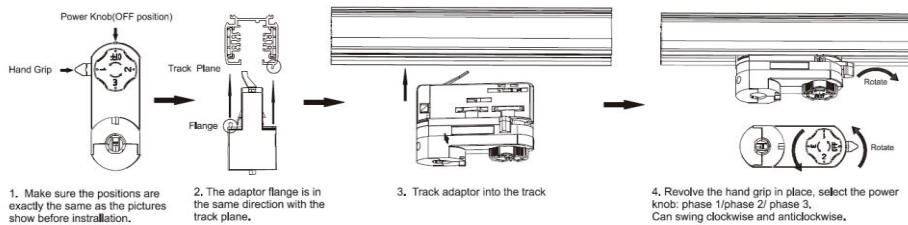

Remove manual

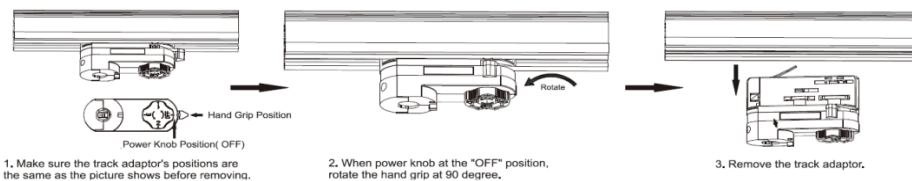

XH-TL-30W-F1Z The technical data represent rated values for an ambient temperature of 25degree, the data values for the luminousflux are initially subject to a tolerance of +/-10%, those for the electrical connected load are initially subject to a tolerance of +/-10%, and those for the color temperature are initially subject to a tolerance of +/- 150K, No liability is assumed for typographical or printing errors the general terms and conditions of Xinghuo LED Tech Limited