

## F1 Integrated series Zoomable tracklight

8-15W

15-55° beam angle adjustable



Commercial lighting Expert

Your reliable Commercial Lighting Solution Partner from China

## Features:

Materials: 6063 brushed Aluminum

Size: D65xH150mm

Finish: White RAL9016

Black RAL9003

LED brand: Citizen COB LED

LED lumen: 130-150lm/W @CRI80

Lamp efficiency: 90-120lm/W

Color:&CRI: 2700K 80+,90+,97+

3000k 80+,90+,97+

3500K 80+,90+

4000k 80+,90+,99+

5000K 80+,90+

Track adapter: Powergear 6/4 wire 3 phase, 3/2 wire 1 phase

Global 6/4 wire 3 phase

Unipro 4 wire 3 phase

Driver brand: Tridonic, HEP, TCI, BOKE, Lifud

Voltage: AC200-240V, AC100-240V

Power Factor: >0.90

Dimmable: DALI, TRIAC, 0/1-10V, ZigBee, RF, Push

Wattage: 8W,10W, 12W,15W

Adjustable: Continual 350°


Vertical 90°

Beam angle: 15-55° beam angle adjustable

Warranty: 3-5 years




## Drawing @ size

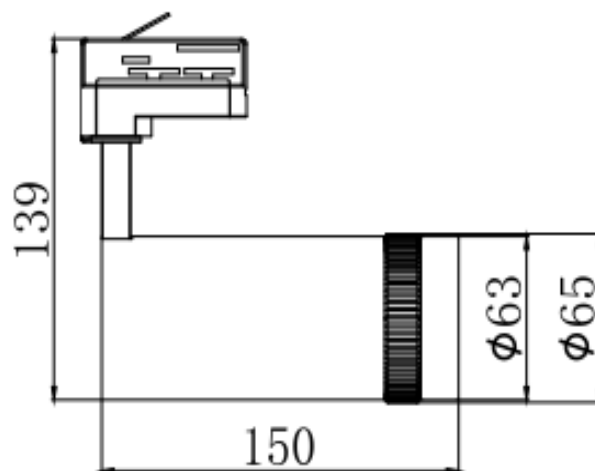


## Light Distribution

Beam angle: 15°

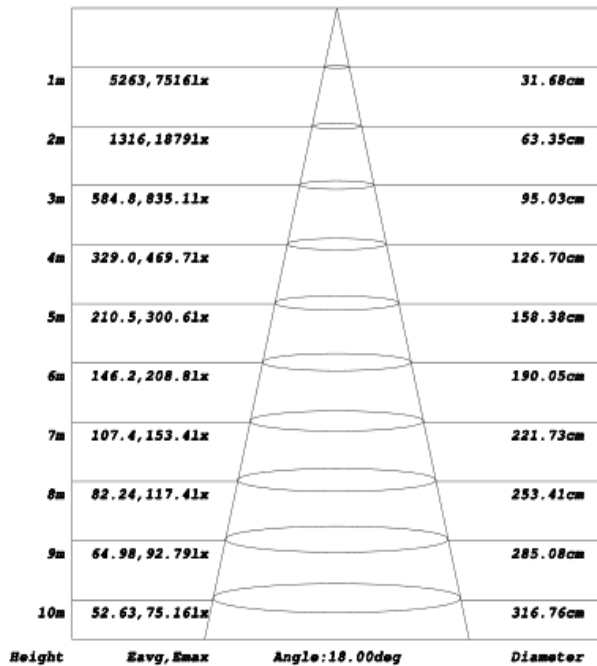


Beam angle: 55°

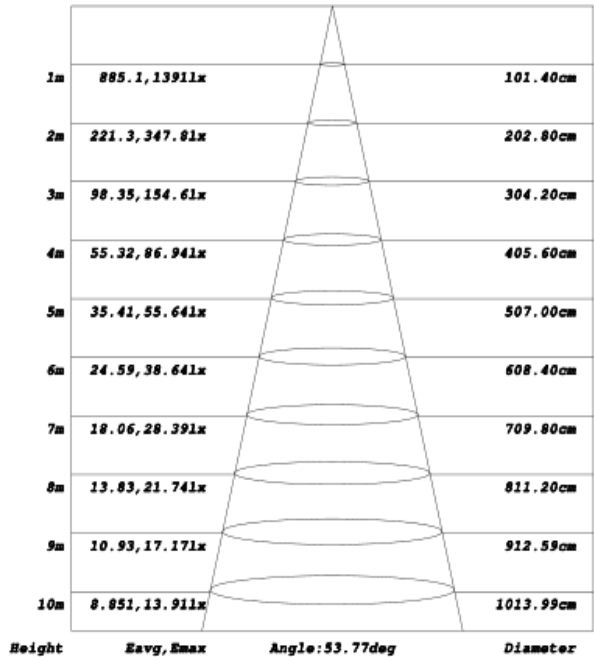


## Package:

Model	XH-TL-8W-F1Z	XH-TL-10W-F1Z	XH-TL-12W-F1Z	XH-TL-15W-F1Z
Quantity:	24pcs	24pcs	24pcs	24pcs
Inner box size:	163x65x157mm	163x65x157mm	163x65x157mm	163x65x157mm
Carton size:	520*282*340mm	520*282*340mm	520*282*340mm	520*282*340mm
Gross Weight:	19.2kg	19.2kg	19.2kg	19.2kg

## Installation manual

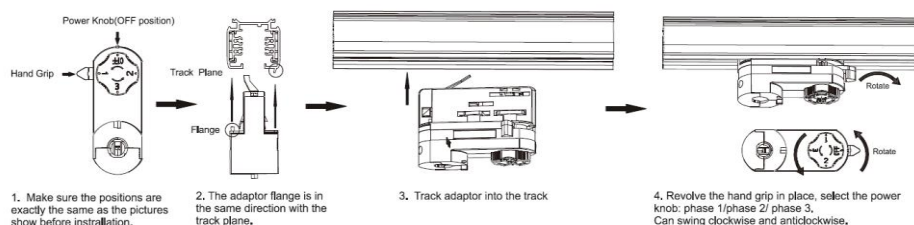

## Remove manual

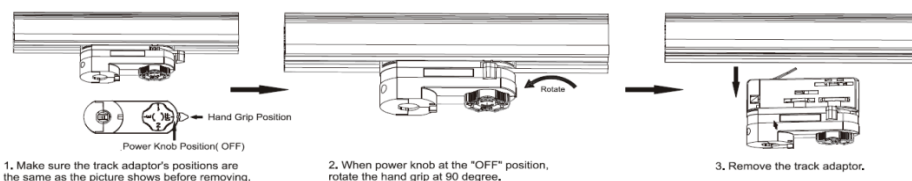

XH-TL-10W-F1Z The technical data represent rated values for an ambient temperature of 25degree, the data values for the luminousflux are initially subject to a tolerance of +/-10%, those for the electrical connected load are initially subject to a tolerance of +/-10%, and those for the color temperature are initially subject to a tolerance of +/- 150K, No liability is assumed for typographical or printing erros the general terms and conditions of Xinghuo LED Tech Limited