

## Driver intrack series tracklight

Ultra thin design



Commercial lighting Expert

Your reliable Commercial Lightng Solution from China

**Features:**

Materials: 6063 brushed Aluminum alloy

Size: D90xH80mm

Finish: White RAL9016

Black RAL9003

LED brand: Citizen COB LED

LED lumen: 140-150lm/W @CRI80

Lamp efficiency: 100-120lm/W

Color:&CRI: 2700K 80+,90+,97+  
 3000k 80+,90+,97+  
 3500K 80+,90+  
 4000k 80+,90+,99+  
 5000K 80+,90+



Track adapter:	Powergear intrack 1/3 phase	On/Off, DALI
	Powergear + TCI intrack 1/3 phase	On/Off, DALI
	Global intrack 3 phase	On/Off, DALI
	Philips intrack 3 phase	On/Off

Voltage: AC200-240V

Power Factor: >0.90


Wattage: 15W(350mA),20W(500mA), 25W(600mA)

Adjustable: Continual 350°  
 Vertical 90°

Beam angle: 15/24/38/60°


Warranty: 5-10 years

**Drawing @ size**

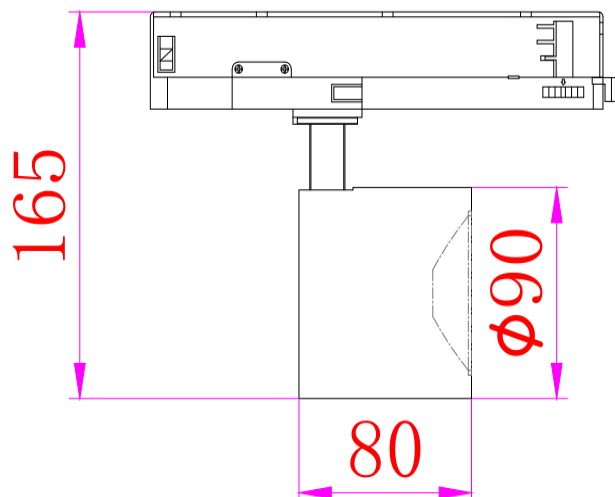


## Light Distribution


Beam angle: 18°

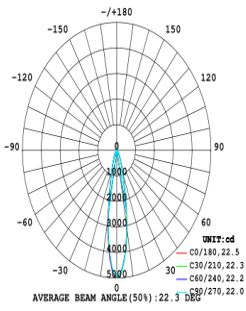


Beam angle: 28°

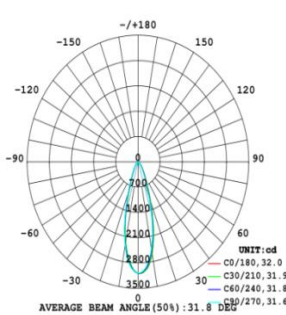





Beam angle: 38°

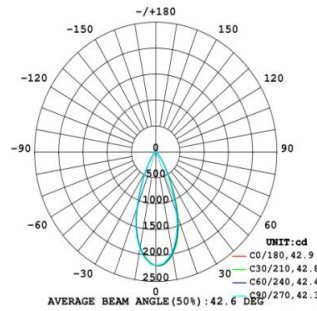

Beam angle: 60°

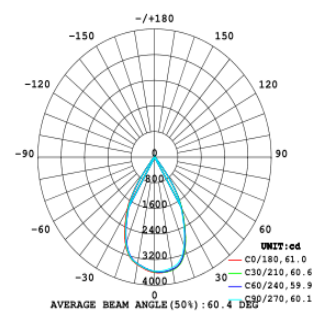


## Distance curve

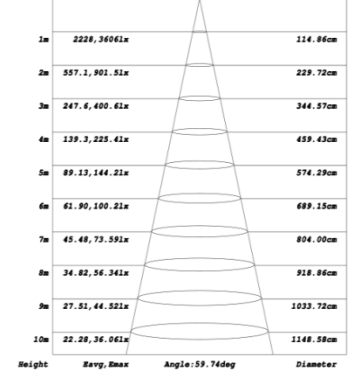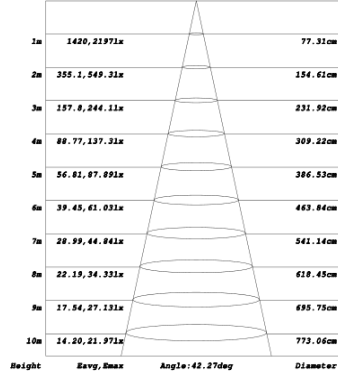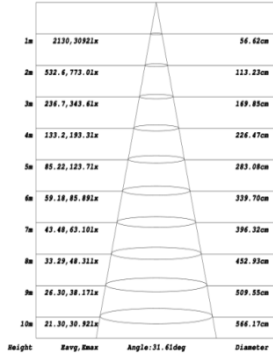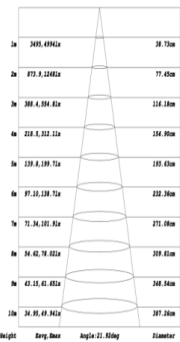


## Package:

Model	XH-TL-15W-O	XH-TL-20W-O	XH-TL-25W-O
Quantity:			
Inner box size:			
Carton size:			
Gross Weight:			

## Installation manual

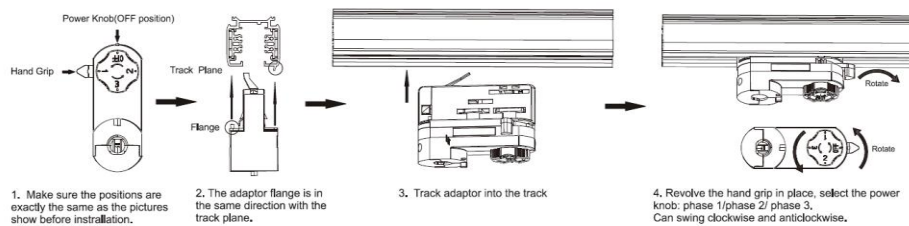

## Remove manual

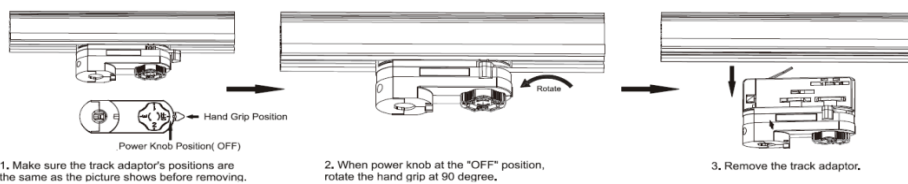

XH-TL-20W-O The technical data represent rated values for an ambient temperature of 25degree, the data values for the luminousflux are initially subject to a tolerance of +/-10%, those for the electrical connected load are initially subject to a tolerance of +/-10%, and those for the color temperature are initially subject to a tolerance of +/- 150K, No liability is assumed for typographical or printing errors the general terms and conditions of Xinghuo LED Tech Limited