

Driver intrack series tracklight

Ultra thin design (Reflector version)



Commercial lighting Expert

Your reliable Commercial Lightng Solution from China

Features:

Materials: 6063 brushed Aluminum alloy

Size: D90xH108mm

Finish: White RAL9016
Black RAL9003

LED brand: Citizen COB LED

LED lumen: 140-150lm/W @CRI80

Lamp efficiency: 100-120lm/W

Color:&CRI: 2700K 80+,90+,97+
3000k 80+,90+,97+
3500K 80+,90+
4000k 80+,90+,99+
5000K 80+,90+

Track adapter:	Powergear intrack 1/3 phase	On/Off, DALI
	Powergear + TCI intrack 1/3 phase	On/Off, DALI
	Global intrack 3 phase	On/Off, DALI
	Philips intrack 3 phase	On/Off

Voltage: AC200-240V

Power Factor: >0.90


Wattage: 15W(350mA),20W(500mA), 25W(600mA)

Adjustable: Continual 350°
Vertical 90°

Beam angle: 15/24/38/60°


Warranty: 5-10 years

Drawing @ size

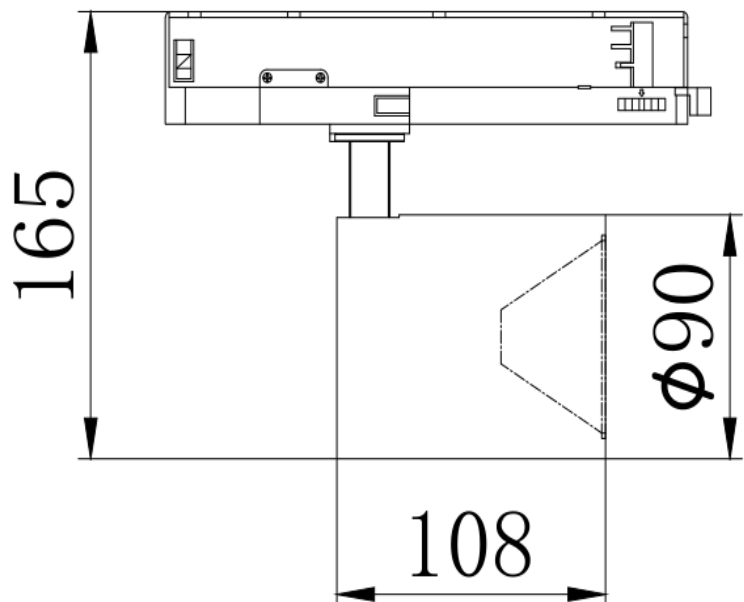


Light Distribution


Beam angle: 15°

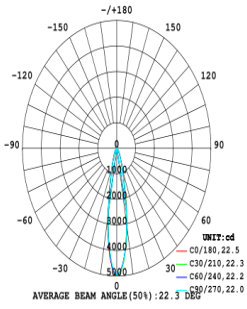


Beam angle: 24°

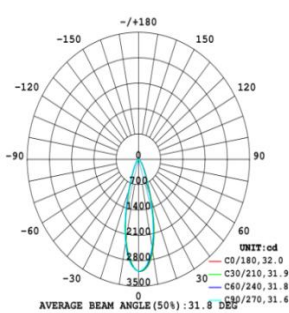





Beam angle: 38°

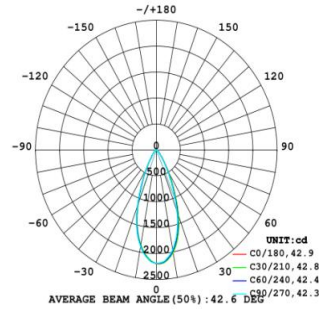

Beam angle: 60°

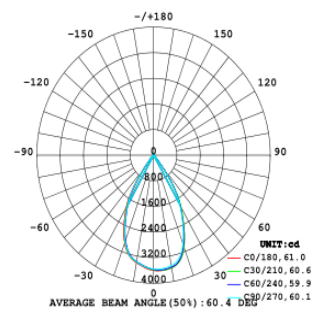


Distance curve

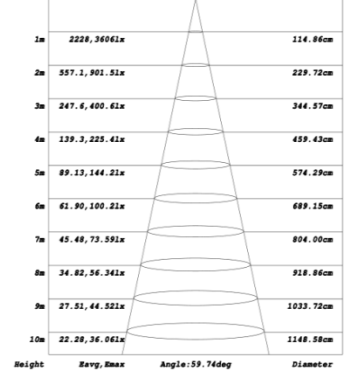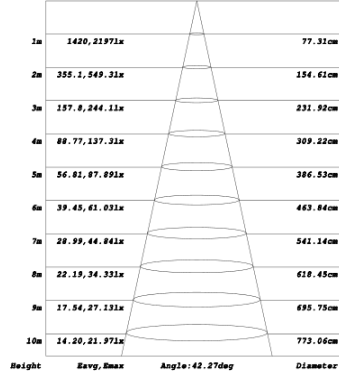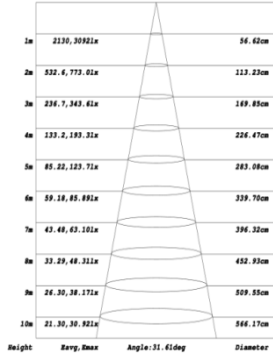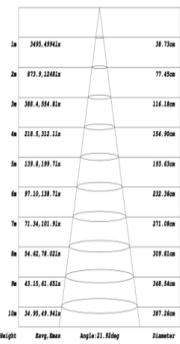


Package:

Model	XH-TL-15W-OR	XH-TL-20W-OR	XH-TL-25W-OR
Quantity:			
Inner box size:			
Carton size:			
Gross Weight:			

Installation manual

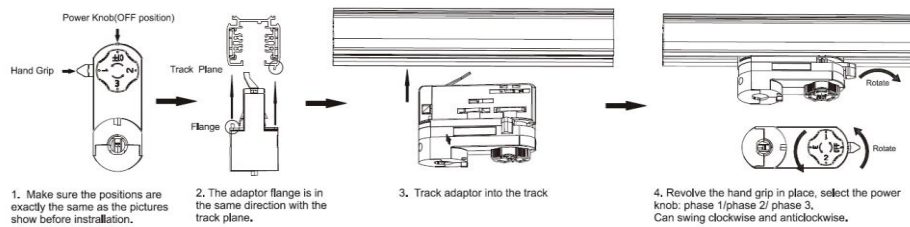

Remove manual

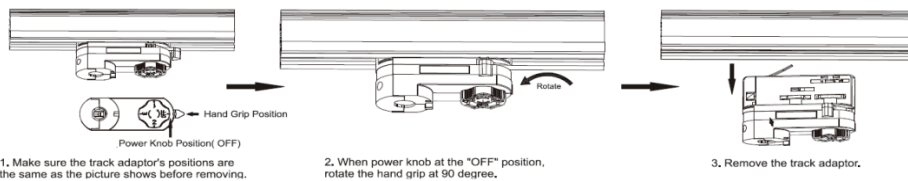

XH-TL-20W-OR The technical data represent rated values for an ambient temperature of 25degree, the data values for the luminous flux are initially subject to a tolerance of +/-10%, those for the electrical connected load are initially subject to a tolerance of +/-10%, and those for the color temperature are initially subject to a tolerance of +/- 150K, No liability is assumed for typographical or printing errors the general terms and conditions of Xinghuo LED Tech Limited