



Shenzhen XINGHUO LED TECH LIMITED

Tel: +86-755-29681895 Web: www.szshoplight.com Email:support@ledxh.cn
Add: 4F Bldg4,Hongfajiateli Industrial Zone,Tangtou Avenue, Shiyao Town,
Bao'an District,Shenzhen,China.518108

Zoom LED track light 25W
15-55degree adjustable
XH-TL-25W-F1Z

Date: _____
To: _____
Project _____
Type: _____
Quantity: _____

Quick info

General

- _____ Ceiling
- _____ Track
- _____ White/black
- _____ 1800-2200lm @CRI80
- _____ IP20
- _____ Built in driver

LED

- _____ 2700K/3000K/4000K
- _____ CRI80+/90+/97+
- _____ L90/50000h
- _____ Initial<3 MacAdam

Optical

- _____ Zoom Lens
- _____ Beam angle:15-55degree

Physical


- _____ diameter 92mm
- _____ Height 190mm
- _____ Tilt max 90°
- _____ Rotation 350°

Electrical

- _____ 25W
- _____ Dimmable, non dimmable
- _____ 80-90lm/W

Description

Track light made of 6063 brushed aluminum alloy, surface powder coated in white and black,spotlight head 350degree rotatable and 90degree tiltable, optimised for flush ceiling installation, converter intergrated into spotlight head; COB technology for maximum efficiency,no multiple shadows; evergy-efficient LEDs with very good color rendering; binning initial< 3 MacAdam; available in the light colors 2700K, 3000K and 4000K; CRI>90; min 80% of the luminous flux after 50000 hours; high quality aluminium reflector with spherical facet finish;precise radiation characteristic with four different beam angles; installed and exchanged without tools; protection class IP20; 3 phase track adapter for toolless and installation or movement on 3 phase power track

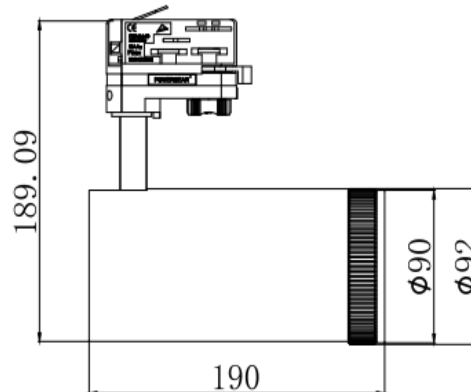




Shenzhen XINGHUO LED TECH LIMITED

Tel: +86-755-29681895 Web: www.szshoplight.com Email:support@ledxh.cn
 Add: 4F Bldg4,Hongfajiateli Industrial Zone,Tangtou Avenue, Shiyao Town,
 Bao'an District,Shenzhen,China.518108


Light Distribution

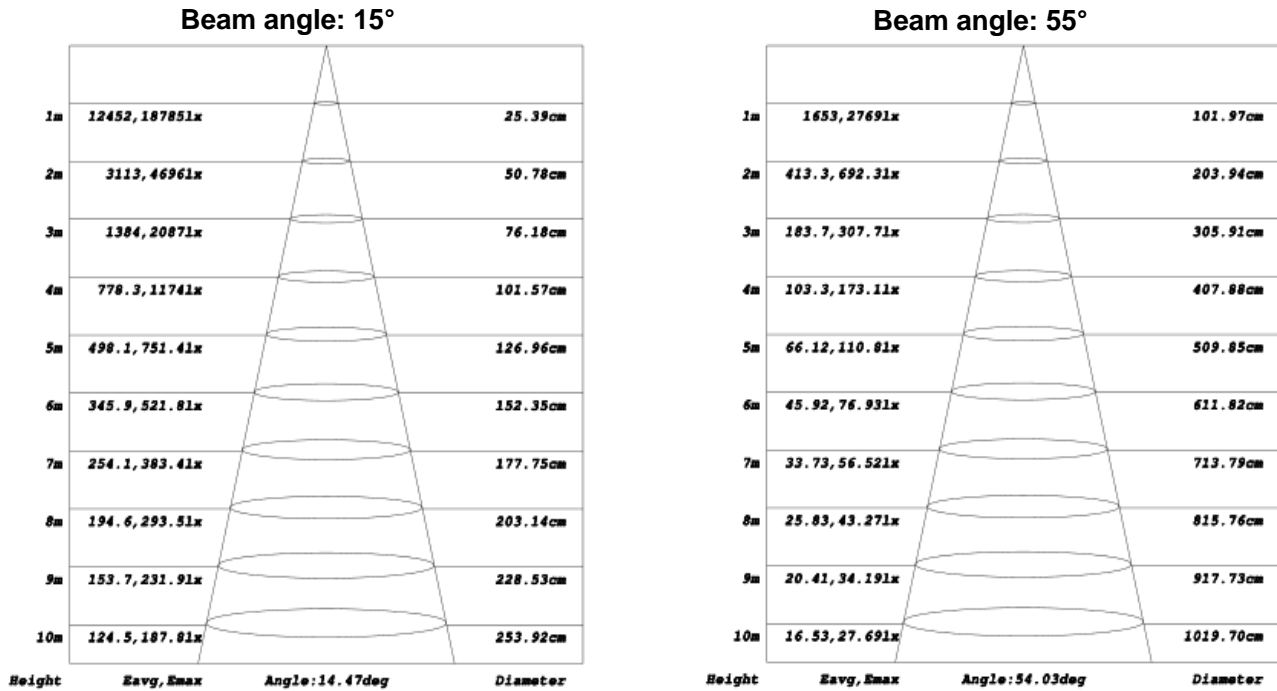


Package:

Model	XH-TL-25W-F1Z
Quantity:	15pcs/carton
Inner box size:	95*95*330mm
Carton size:	512*312*H340mm
Gross Weight:	19.5kg

Installation manual

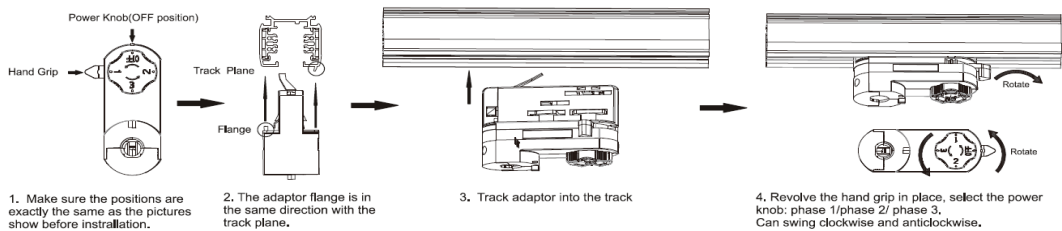

Remove manual

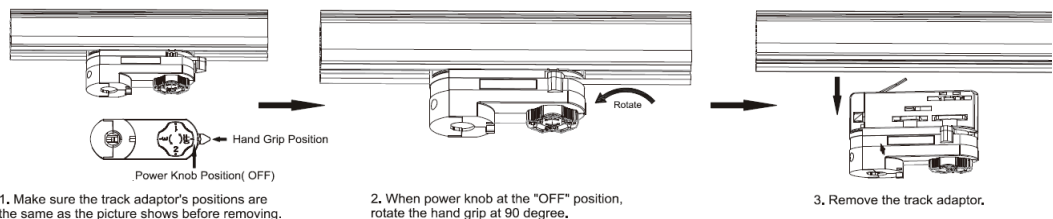

XH-TL-25W-F1Z The technical data represent rated values for an ambient temperature of 25degree, the data values for the luminousflux are initially subject to a tolerance of +/-10%, those for the electrical connected load are initially subject to a tolerance of +/-10%, and those for the color temperature are initially subject to a tolerance of +/- 150K, No liability is assumed for typographical or printing errors the general terms and conditions of Xinghuo LED Tech Limited