DALI/DMX/0/1-10V LED Track Light





Xinghuo LED Tech Limited

Your best LED lighting partner in China

1 Description: Page 3-4

1 A series LED track light Page 5-6


2 B series LED track light Page 7-8

C series LED track light Page 9-10

4 Bean angle adjustable track light Page 11-12

5 FAQ Page 13-14

How our DALI/DMX/0/1-10V LED track light work?

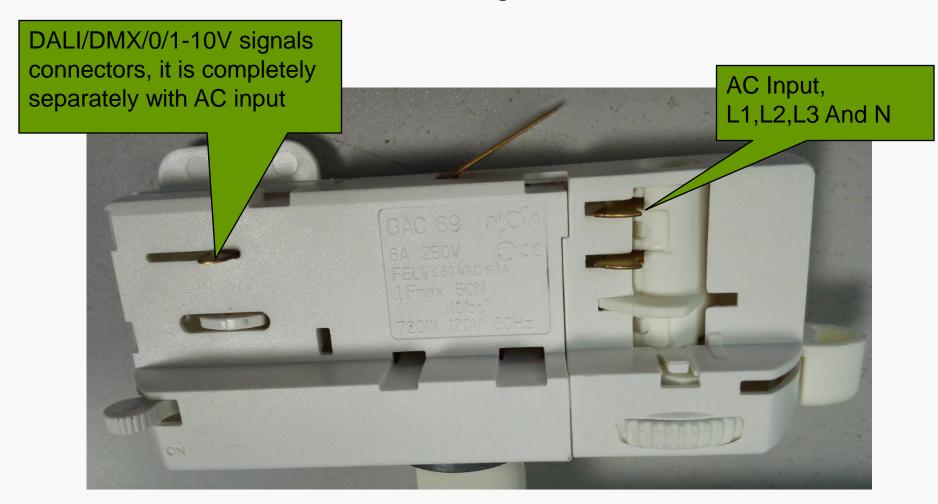

- Our DALI, DMX, 0/1-10V LED track light is completely different with most of the track light in the markets,
- The signals was completely separately with AC in put, avoid the mistake of the fixture and no interfere to the signals, it is much safer and better lighting performance.
- DALI series LED track light, our track light can work with Tridonic,
 Philips, Mean Well, TCI etc DALI driver, dimmable and flicker free,
- You can get a excellent performance with our track light,.
- DMX series LED track light, Our track light work with DMX512 dimmable driver, they can work with normal DMX console or master sleeve, you can control them together or seperately.
- 0/1-10V series LED track light, our track light can work with normal track, with 0/1-10V dimmer, can get a very good dimming effect, very soft and no flicker in any brightness.

- LED light source: CITIZEN/CREE/SHARP COB LEDs,
- **Lumen:** 90-100lm/W, CRI97, 90+/80+ for your selection
- Housing Material: 6063 Brushed aluminum,
- Phase: 6-wire DALI power adapter
- Power Option: 10W, 15W, 20W, 30W, 35W
- Driver: Tridonic, Philips, Mean Well, TCI DALI driver, PF>0.95, PE>88%, DALI, DMX, TRIAC, 0/1-10V, ZigBee, RF dimmable,
- **Warranty:** 3-5 years warranty any quality problem, we will send driver or lamp or accessories for replacement first, we pay the shipping cost too,



Series A: COB LED track light (CRI80/90/97) no flicker driver

Model	Picture	Size(DxLxH) (mm)	Connector Phase	LED Brand	Power (W)	Voltage& Frequency	Color& Kelvin	lumen@ Ra>80	Beam Angle	IP Rate
New XH-TL-15W-A	1	60*105*190	2-wire 3-wire 4-wire	Citizen 1202 COB LED	15W	AC100- 240V 50/60Hz PF>0.90	2700K 3000K 4000K	1300- 1500lm	10° 23° 38°	IP44
XH-TL-20W-A		70*122*245	2-wire 3-wire 4-wire	Citizen 1205 COB LED	20W	AC100- 240V 50/60Hz PF>0.95	2700K 3000K 4000K	1800- 2000lm	10° 23° 38°	IP44
XH-TL-25W-A		70*122*245	2-wire 3-wire 4-wire	Citizen 1205 COB LED	25W	AC100- 240V 50/60Hz PF>0.95	2700K 3000K 4000K	2200- 2500lm	10° 23° 38°	IP44
XH-TL-30W-A		80*150*216	2-wire 3-wire 4-wire	Citizen COB 1206 LED	30W	AC100- 240V 50/60Hz PF>0.95	2700K 3000K 4000K	2700- 3000lm	10° 23° 38°	IP44

- LED light source: CITIZEN/CREE/SHARP COB LEDs,
- Lumen: 90-100lm/W, CRI97+, 90+/80+ for your selection
- Housing Material: 6063 Brushed aluminum,
- Phase: 6-wire DALI power adapter
- Power Option: 10W, 15W, 20W, 30W, 35W
- Driver: : Tridonic, Philips, Mean Well, TCI, DALI driver, PF>0.95, PE>88%, DALI, DMX, TRIAC, 0/1-10V, ZigBee, RF dimmable,
- **Warranty:** 3-5 years warranty any quality problem, we will send driver or lamp or accessories for replacement first, we pay the shipping cost too,







COB LED track light (CRI80/90/97)											
Model	Picture	Size (mm)	Connecter Phase	LED Brand &quantity	Power (W)	Voltage& Frequency	Color& Kelvin	lumen@ Ra>80	Beam Angle	IP Rate	
XH-TL-10W- B		75mm*83mm* 165mm	2-wire 3-wire 4-wire	Citizen COB LEDs	10W	AC100-240V 50/60Hz PF>0.90	WW/NW /CW 2700/3000 K/4000K/50 00K	900- 1000lm	10° /23° /38°	IP44	
XH-TL-15W- B		75mm*83mm* 165mm	2-wire 3-wire 4-wire	Citizen COB LEDs	15W	AC100-240V 50/60Hz PF>0.90	WW/NW /CW 2700/3000 K/4000K/50 00K	1300- 1500lm	10° /23° /38°	IP44	
XH-TL-20W- B	1	75mm*83mm* 165mm	2-wire 3-wire 4-wire	Citizen COB LEDs	20W	AC100-240V 50/60Hz PF>0.95	WW/NW /CW 2700/3000 K/4000K/50 00K	1800- 2000lm	10° /23° /38°	IP44	
XH-TL-25W		95mm*108m m*185mm	2-wire 3-wire 4-wire	Citizen COB LEDs	25W	AC100-240V 50/60Hz PF>0.95	WW/NW /CW 2700/3000 K/4000K/50 00K	2200- 2500lm	10° /23° /38°	IP44	
XH-TL-30W- B		95mm*108m m*185mm	2-wire 3-wire 4-wire	Citizen COB LEDs	30W	AC100-240V 50/60Hz PF>0.95	WW/NW /CW 2700/3000 K/4000K/50 00K	2700- 3000lm	10° /23° /38°	IP44	

- LED light source: CITIZEN/CREE/SHARP COB LEDs,
- **Lumen:** 90-100lm/W, CRI97, 90+/80+ for your selection
- Housing Material: 6063 Brushed aluminum,
- Phase: 6-wire DALI power adapter
- Power Option: 10W, 15W, 20W, 30W. 40W
- Driver: : Tridonic, Philips, Mean Well, TCI, DALI driver, PF>0.95, PE>88%, DALI, DMX, TRIAC, 0/1-10V, ZigBee, RF dimmable,
- **Warranty:** 3-5 years warranty any quality problem, we will send driver or lamp or accessories for replacement first, we pay the shipping cost too,









COB LED track light (CRI80/90/97)										
Model	Picture	Size (mm)	Connecter Phase	LED Brand	Power (W)	Voltage& Frequency	Color& Kelvin	lumen@ Ra>80	Beam Angle	IP Rate
XH-TL-15W- C	10	90mm*134m m*169mm	2-wire 3-wire 4-wire	Citizen COB LEDs	15W	AC100-240V 50/60Hz PF>0.90	WW/NW /CW 2700/3000 K/4000K/50 00K	1300- 1500lm	10° /23° /38°	IP44
XH-TL-20W- C		90mm*134m m*169mm	2-wire 3-wire 4-wire	Citizen COB LEDs	20W	AC100-240V 50/60Hz PF>0.95	WW/NW /CW 2700/3000 K/4000K/50 00K	1800- 2000lm	10° /23° /38°	IP44
XH-TL-25W- C		90mm*134m m*169mm	2-wire 3-wire 4-wire	Citizen COB LEDs	25W	AC100-240V 50/60Hz PF>0.95	WW/NW /CW 2700/3000 K/4000K/50 00K	2200- 2500lm	10° /23° /38°	IP44
XH-TL-30W- C	Ь	90mm*134m m*169mm	2-wire 3-wire 4-wire	Citizen COB LEDs	30W	AC100-240V 50/60Hz PF>0.95	WW/NW /CW 2700/3000 K/4000K/50 00K	2700- 3000lm	10° /23° /38°	IP44
XH-TL-40W- C		100mm*153 mm*177mm	2-wire 3-wire 4-wire	Citizen COB LEDs	40W	AC100-240V 50/60Hz PF>0.95	WW/NW /CW 2700/3000 K/4000K/50 00K	3200- 3500lm	10° /23° /38°	IP44

- LED light source: CITIZEN/CREE/SHARP COB LEDs,
- Lumen: 90-100lm/W, CRI97, 90+/80+ for your selection
- Housing Material: 6063 Brushed aluminum,
- Phase: 6-wire DALI power adapter
- Power Option: 10W, 15W, 20W, 25W, 30W. 35W
- Driver: : Tridonic, Philips, Mean Well, TCI, DALI driver,
 PF>0.95, PE>88%, DALI, DMX, TRIAC, 0/1-10V, ZigBee, RF dimmable,
- **Warranty:** 3-5 years warranty any quality problem, we will send driver or lamp or accessories for replacement first, we pay the shipping cost too,



Model	Picture	Size(DxLxH) (mm)	Connector Phase	LED Brand	Power (W)	Voltage& Frequency	Color& Kelvin	lumen@ Ra>80	Beam Angle	IP Rate
New XH-TL-15W-E		60*200*225	2-wire 3-wire 4-wire	Citizen 1202 COB LED	15W	AC100- 240V 50/60Hz PF>0.90	2700K 3000K 4000K	900- 1000lm	10-70°	IP44
XH-TL-20W-E		70*208*235	2-wire 3-wire 4-wire	Citizen 1205 COB LED	20W	AC100- 240V 50/60Hz PF>0.95	2700K 3000K 4000K	1200- 1400lm	10-70°	IP44
XH-TL-25W-E		70*208*235	2-wire 3-wire 4-wire	Citizen 1206 COB LED	25W	AC100- 240V 50/60Hz PF>0.95	2700K 3000K 4000K	1500- 1800lm	10-70°	IP44





Pull the track light, decreases the beam angle, push the track light increases the beam angle, turn right, you can change the beam angle from 10-70degree

10-70degree

- FAQ:
- 1.What is CRI?
- CRI is short for color redering Index
- 2. Why should I take CRI97 Lamps?
- Higher CRI lights will let you see the natrual color of the goods, if CRI70 or lewer, the goods looks ugly or loss the natrual color with the lights.
- 3. What is your LED brand?
- We take Citizen COB LEDs as light sources, it is original from Japan
- 4. Why Citizen COB LEDs?
- Citizen is the leader of COB LEDs, it is the best suppliers worldwide.
- 5. Why the lumen is only 90-100lm?
- Higher CRI, the lumen will be lower, but Citizen COB is the highest when the CRI97 compared with other brand,
- 6, Why DALI/DMX/0/1-10V LED track light?
- You can replace the old lamps directly, save time, save money.

The End

Thank you



Add: 3F Bldg3, Landwind Industrial Zone, Tangtou Avenue, District, Shenzhen, China. 518108

Shiyan Town, Bao'an

Tel: 0086-755-29681895 Fax: 0086-755-29681896 Web: www.ledxh.cn Email: support@ledxh.cn